




PCI / IB 03 / 03 / 02

22.08.03 #2

107526193

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

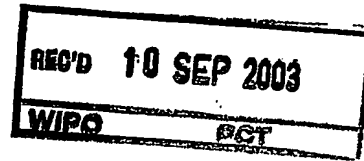


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

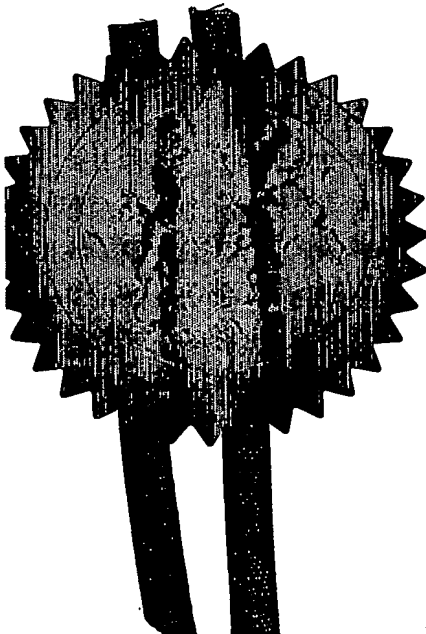

Signed

H. Behan


Dated

6 June 2003

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

An Executive Agency of the Department of Trade and Industry



05SEP02 E746056-5 D02879
P01/7700 0.00-0220618.3

Request for grant of a patent

See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office
Cardiff Road
Newport
Gwent NP10 8QQ

Your reference

PHGB020143

Patent application
(The P)

0220618.3

5 SEP 2002

Full name, address and postcode of the or of each applicant (*underline all surnames*)

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS

Patents ADP Number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

THE NETHERLANDS

7419294001

Title of the invention

APPARATUS AND RELATED METHOD FOR DATA TRANSMISSION ACROSS A WIRELESS NETWORK

Name of your agent (*if you have one*)
"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

STEVE TOWNSEND
Philips Intellectual Property and Standards
Cross Oak Lane
Redhill
Surrey RH1 5HA

Patents ADP number (*if you know it*)

8359655001

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority Application number
(*if you know it*)

Date of filing
(*day/month/year*)

If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day/month/year*)

Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer "Yes" if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description

9

Claims(s)

4

Abstract

1

Drawings

2

DMC
only

If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(Please specify)

I/We request the grant of a patent on the basis of this application.

Signature

S. Townsend

Date

04/09/02

Name and daytime telephone number of person to contact in the United Kingdom

01293 815339

(S. Townsend)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered "Yes" Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

**APPARATUS AND RELATED METHOD FOR DATA
TRANSMISSION ACROSS A WIRELESS NETWORK**

5

The present invention relates to a method and related apparatus for the transmission of data across a wireless network and in particular, but not exclusively, to a method and apparatus for streaming real-time audio and video content across a wireless network link.

10

Communication systems are being developed which seek to stream real-time audio and video data across standardised wireless network links. However it has been identified that problems arise relating to the synchronisation of the audio/video data content at a client terminal when seeking to output and display the content at exactly the same rate as it was originally produced.

15

While systems employing standard set-top boxes can readily employ a synchronisation clock taken directly from the incoming transport stream, a client terminal that is connected to a server merely by way of a standardised wireless network does not have accurate access to this clock. The incoming transport stream arriving at such set-top boxes comprises a highly stable signal produced by a broadcaster for a client/server wireless network infrastructure, accurate access to this clock cannot be achieved due to jitter inherent in the wireless network and also due to latency arising within the networking software of the system. As such, high-level software is arranged to insert a clock reference into a packet to be sent through the network, a highly variable delay between when the clock reference is inserted and when the packet is sent, and when the software at the client device will actually retrieve the clock reference in the packet will be experienced.

20

25

30

Published patent application US 2002/0031196 discloses a clock-regeneration system in which a server is arranged to transmit a small packet at regular intervals, and which seeks to describe clock data for subsequent use in

achieving synchronisation at a client device. However, the manner in which the containing the clock data packets are created and sent is disadvantageously limited, and the system itself also has disadvantages particularly if packet-delivery failure occurs.

5

The present invention seeks to provide for an apparatus and related method which can be used for the accurate synchronisation of, for example, audio and video data transmitted from a server across a standard wireless network link to one or more client devices.

10

According to one aspect of the present invention there is provided transmitting means for transmitting data packets in a wireless network, wherein at least some of the data packets are arranged to include clock data for use at a receiving means in the network for clock reconstruction at the receiving means, the transmitting means including processing means and operating system means connected to a network controller for delivering the data packets to the network, wherein the transmitting means is arranged to identify packets arriving at the network controller and which require clock data, and wherein the network controller is arranged to insert the clock data within the said identified packet prior to transmission of the packet.

20

The invention is advantageous in that through the adaptation of the wireless network control in the above-mentioned manner, the clock data held within the packet being transmitted is found to be very close to the running clock in the transmitting means.

25

The feature of Claim 2 is particularly advantageous in allowing for identification of the appropriate clock signal to be inserted within the packet and in particular with regard to the intended receiving means.

30

The subject matter of Claim 3 renders the invention particularly advantageous if the wireless network protocol requires, for any particular reason, a packet to be resent.

The features of Claim 4 serve to make advantageous use of the appearance of previous clock reference within a packet if a resend is required.

The features of Claims 5, 6 and 7 offer particularly advantageous, but simplified, means for identifying that a packet to be sent over the network is to include clock reference data.

The features of Claims 8, 9 and 10 prove advantageous for situations in which the transmitting means might be required to transmit different streams of data to the respective different receiving means, each of which might require clock references running at slightly different rates.

According to another aspect of the present invention, there is provided receiving means for receiving signals delivered over a wireless network and which include packets with clock reference data from a transmitting means for reconstruction of a clock reference at the receiving means, the receiving means including a front end comprising a wireless network controller connected to operating system means, wherein the said front end is arranged to identify clock reference data in a packet and to synchronise a clock of the receiving means accordingly.

The features of Claims 12 and 13 are advantageous in allowing reconstruction of the clock in a manner so as to minimise errors arising therein.

Advantageously, and as defined in Claim 14, the operating system of the receiving means can be arranged to identify data entering a particular socket at the receiving means and so as to provide a particular reliable and accurate arrangement for identifying those data packets that also include clock data.

As defined in Claims 15 and 16, the clock of the receiving means can advantageously be set directly once identified at either the wireless network controller or the operating system therefore. Alternatively the receiving means can include a feedback arrangement whereby a local clock value and frequency are altered to keep time with the incoming clock data received from transmitting means over the wireless network.

According to a further aspect of the present invention, there is provided a method including the step of synchronising a receiving means to a clock of a transmitting means over a wireless network, the transmitting means including processing means and operating system means for delivering data packets to

the network of inserting at the wireless network controller clock reference data into identified packets and prior to delivery of the packets onto the wireless network.

The present invention also provides for a wireless network system of:
5 synchronising a receiving means to a clock of a transmitting means over a wireless network, the transmitting means including processing means and operating system means for delivering data packets to the network including the means for identifying data packets in which clock reference data is to be inserted and means for inserting at the wireless network controller clock
10 reference data into the identified packets and prior to delivery of the packets onto the wireless network.

In accordance with another aspect of the present invention, there is provided transmitting means for transmitting data packets in a wireless network, wherein at least some of the data packets are arranged to include
15 clock data for use at receiving means in the network for clock reconstruction at the receiving means, the transmitting means including processing means and operating system means connected to a network controller for delivering the data packets to the network, and including means for determining receipt at the receiving means of the data packets sent over the network and arranged to
20 resend the packet if receipt is not acknowledged, the network controller further being arranged to insert updated clock reference data prior to resending a packet.

Advantageously, the updated clock reference is arranged to be inserted within the data packet in a manner as defined above.

25 In a further aspect of the present invention, there is provided a method of synchronising the clock of a receiving means to a clock signal from a transmitting means in a wireless network, wherein the clock at the receiving means is reconstructed from a data packet delivered from the transmitting means and including the step of monitoring acknowledgement of receipt of the
30 packet at the receiving means, and resending the said packet if receipt is not acknowledged, and including the step of inserting updated clock reference data in the packet prior to resending the packet.

Advantageously, the step of inserting the updated clock reference data is conducted as defined above.

As should therefore be appreciated, the present invention provides for a method and related system and apparatus for enhancing synchronization

5 between real-time clocks within a wireless network environment particularly if data packets containing clock reference data are to be resent.

The invention is described further hereinafter, by way of example only, with reference to the accompanying drawings in which:

10 Fig. 1 is a schematic block diagram of a currently known wireless network system illustrating a server and a client; and

Fig. 2 is a schematic block diagram of a wireless network system employing a server and a client and embodying an aspect of the present invention.

15

Turning first to Fig. 1, there is illustrated a wireless network communications system 10 arranged for use as part of a wireless network as currently known and comprising a server 12 and client 14.

20 In order to achieve synchronisation between the server 12 and client 14, the client 14 seeks to reconstruct a clock signal corresponding to that running at the server 12.

A transport stream input signal 16 is delivered to the server 12 to a demultiplexer 18 and clock regeneration element 20 for producing a memory mapped clock by means of which clock reference data is generated from the input transport stream 16.

25 A processor 22 arranged to run wireless audio/video protocol software is also arranged to receive the clock reference from the clock unit 20 and to insert the reference into an appropriate packet for onward transmission as a so-called clock packet. Thus, the software within the processor 22 is arranged to read the memory mapped clock at the clock unit 20 and to insert this information into a packet, which data is then added to the end of a variable length register such as a FIFO.

30

The clock packet is delivered from the processor 22 to an operating system 24 which includes an IP networking stack.

A wireless network controller 26 is connected to the operating system 24 by means of, for example of a PCI bus, or PI bus for onward delivery over a wireless network link 28 to the client device 14.

It will be appreciated that there will therefore necessarily be some delay between insertion of the clock reference into the packet at the processor 22, and the eventual delivery of the packet onto the wireless network 28 particularly in view of the variety of queues and registers that are inherent in the connectivity between the processor 22 and indeed the operating system 24 and the wireless network controller 26.

As will be appreciated from the following description of the client 14, similar queues and registers as arising in the server 12 are found within the connectivity inherent in the client 14 and which introduce further latency with regard to the passage of the clock packet before the clock reference is eventually reconstructed.

Turning now to the client 14, it will be appreciated that this corresponds to the server 12, and including a wireless network controller 30, operating system 32, a processor 34 and decoder 36 and a clock regeneration unit 38.

However, insofar as the client 14 is arranged to receive data from the wireless network link 28, it is the wireless network controller 30 that is arranged to receive data for onward deliver through the client device 14 via the operating system 32 and processor 34. A clock generation unit 38 comprises a memory mapped clock system for establishment of a clock signal of variable value and frequency and the decoders 36 are arranged to operate under control of the memory mapped clock.

However, in this known system, the delays in latency discussed above prove disadvantageously limiting in seeking to reproduce the clock from the server 12 at the client 14.

Turning now to Fig. 2, there is illustrated a system arrangement embodying an aspect of the present invention and which includes similar elements at the server and client to those illustrated in Fig. 1. The same

reference numerals have been employed where appropriate.

However, the configuration and control of these elements is quite different and leads to the particular advantages inherent in the present invention.

5 In the configuration of the illustrated embodiment of the present invention in Fig. 2, it will be appreciated that the memory-mapped clock data is not delivered from the clock unit 20 to the processor 22, but rather is delivered directly to the wireless network controller 26. Likewise, at the client device 14, the wireless network controller 30, or alternatively, the operating system 32 is
10 arranged to establish the regenerated clock 36 directly rather than via the processor 34.

Returning to the client device 12, the processor 22 is arranged to deliver instructions to the operating system 24 and the wireless network controller 26 that, in particular, identify the data packets that are to be accompanied by
15 clock reference data.

Upon receipt of such packets at the wireless network controller 26, the controller 26 reads memory-mapped clock data directly from the clock unit 20 and overwrites a particular location within the packet with the clock value. Thus, just before the wireless network controller 26 is about to transmit a
20 packet over the wireless connection 28, and which has been marked by the operating system as a "clock" packet, the wireless controller reads the memory-mapped clock 20 to obtain an up-to-date clock value for delivery over the wireless connection 28. This is true both for the case in which the packet is being sent for the first time or also if the wireless protocol requires the packet
25 to be resent, for example due to failure of delivery of the packet when originally sent. If the packet is being resent, then the clock data is advantageously updated at the wireless network controller prior to resending.

The above-mentioned features allow for the clock reference data held within a clock packet to remain very close to the clock running in the server 12.

30 It should be appreciated that there are variety of ways in which a particular packet can be marked as a so-called clock packet. One aspect comprises an arrangement in which an application is determined to use a

setting on a specific datagram socket and this dictates that all packets passing through that particular socket should therefore be marked as a datagram. Such a setting can also serve to identify where within the packet the wireless network controller 26 should write the clock data. As an alternative, the clock signal could be included within out-of-banded data.

At the client device 14, although reconstruction of the clock could be achieved in a user-level application, it is noted that some jitter would still arise due to the FIFO employed at the client.

As noted in the illustrated embodiment, the clock setting is advantageously therefore achieved by the wireless network controller or by lower levels of the operating system 32. Further, not only is control achieved through the operating system so as to identify which packets are to contain clock data reference, the operating system can also be arranged to set an offset and length within the packet into which the clock data reference is to be inserted.

The client 14 can be arranged to operate in a manner similar to the server 12 insofar as the wireless network controller 30 or the operating system 32 can be arranged to identify data entering a particular socket in the client system. Such data is therefore readily identified and the client system clock then set to the new value. As illustrated in Fig. 2, the system clock in the client can be set directly although it should be appreciated that the feedback mechanism can be employed wherein a clock's value and frequency and adjusted to keep in time with the identified incoming clock data.

The present invention is particular advantageous in that clock information is included within packets along with the data in, for example, a one to one network. However, the invention could be advantageously employed for use with multi-cast networks and in a situation where a server is streaming different streams to a large number of clients and, in particular, where the streams might require respective clock references running at slightly different rates. In this manner, the packet can also contain a reference describing which real-time clock should be accessed for such packets.

Again, this can prove particularly advantageous in a situation where a

server might be required to stream different streams to a variety of clients each of which requires a different clock reference from a respective different clock source.

As noted, the invention also advantageously allows for the updating of clock reference data within signals that are being resent. The appearance of previous, and now out of date, clock reference data within a packet to be resent can advantageously be employed within the wireless network controller as a means for identifying those packets that are to have clock reference data introduced therein prior to transmission over the wireless link.

10 It should be appreciated that the present invention is not restricted to the details of the foregoing embodiment insofar as it can be employed for use in any appropriate communication system requiring real-time clock synchronisation with wireless network protocols.

CLAIMS

1. Transmitting means for transmitting data packets in a wireless network, wherein at least some of the data packets are arranged to include
5 clock data for use at a receiving means in the network for clock reconstruction at the receiving means, the transmitting means including processing means and operating system means connected to a network controller for delivering the data packets to the network, wherein the transmitting means is arranged to identify packets arriving at the network controller and which require clock data,
10 and wherein the network controller is arranged to insert the clock data within the said identified packet prior to transmission of the packet.
2. Transmitting means as defined in Claim 1 wherein the network controller is arranged to read a memory-mapped clock in order to obtain the
15 clock reference data.
3. Transmitting means as claimed in Claim 1 or 2 and arranged to insert clock reference data into packets that are to be resent over the network.
- 20 4. Transmitting means as claimed in Claim 1, 2 or 3 and arranged to employ a setting on a datagram socket in order to identify a packet for the inclusion of clock reference data.
5. Transmitting means as claimed in Claim 4 and arranged such
25 that the setting on the datagram socket further identifies where within the packet the clock reference data is to be inserted.
6. Transmitting means as claimed in any one of Claims 1-3 and arranged to deliver the clock signal as out-of-band data.
- 30 7. Transmitting means as defined in any one or more of Claims 1-6, and arranged such that the clock reference is included within packets along

with data to be transmitted over the network.

8. Transmitting means as claimed in any one or more of Claims 1-7,
and arranged to obtain clock reference data from a plurality of clocks running
5 at different rates.

9. Transmitting means as claimed in Claim 8 and arranged to
include within a packet a reference identifying which of the plurality of clocks is
to be accessed for providing the clock reference data.

10

10. Transmitting means as claimed in Claim 9, wherein the
operating system is arranged to set an offset and length within a packet in
which the clock reference data is to be inserted.

11. Receiving means for receiving signals delivered over a wireless
network and which include packets with clock reference data from a
transmitting means for reconstruction of a clock reference at the receiving
means, the receiving means including a front end comprising a wireless
network controller connected to operating system means, wherein the said
20 front end is arranged to identify clock reference data in a packet and to
synchronise a clock of the receiving means accordingly.

12. Receiving means as claimed in Claim 11, wherein the clock is
arranged to be set by means of the wireless network controller.

25

13. Receiving means as claimed in Claim 11, wherein the clock is
arranged to be set by means of the operating system.

14. Receiving means as claimed in Claim 11, 12 or 13 and arranged
30 to identify data entering a particular socket therein for identification of the clock
reference data.

15. Receiving means as claimed in any one or more of Claims 11-14, wherein the clock is arranged to be set directly from the reconstructed clock data.

5 16. Receiving means as claimed in any one or more of Claims 11-14, and including feedback means arranged to control alteration of a local clock on the basis of the recovered clock data.

10 17. A method including the step of synchronising a receiving means to a clock of a transmitting means over a wireless network, the transmitting means including processing means and operating system means for delivering data packets to the network and including the step of inserting, at the wireless network controller, clock reference data into identified packets and prior to delivery of the packets onto the wireless network.

15 18. A system of synchronising a receiving means to a clock of a transmitting means over a wireless network, the transmitting means including processing means and operating system means for delivering data packets to the network, including means for identifying the data packets in which clock
20 reference data is to be inserted and means for inserting, at the wireless network controller, clock reference data into the identified packets and prior to delivery of the packets onto the wireless network.

25 19. Transmitting means for transmitting data packets in a wireless network, wherein at least some of the data packets are arranged to include clock data for use at receiving means in the network for clock reconstruction at the receiving means, the transmitting means including processing means and operating system means connected to a network controller for delivering the data packets to the network, and including means for determining receipt at
30 the receiving means of the data packets sent over the network and arranged to resend the packet if receipt is not acknowledged, the network controller further being arranged to insert updated clock reference data prior to resending a

packet.

20. Transmitting means as claimed in Claim 19 and further comprising a transmitting means as claimed in any one or more of Claims 1 to

5 10.

21. A method of synchronising the clock of a receiving means to a clock signal from a transmitting means in a wireless network, wherein the clock at the receiving means is reconstructed from a data packet delivered from the transmitting means and including the step of monitoring acknowledgement of receipt of the packet at the receiving means, and resending the said packet if receipt is not acknowledged, and including the step of inserting updated clock reference data in the packet prior to resending the packet.

15 22. A method as claimed in Claim 21, and further comprising the method as claimed in Claim 17.

ABSTRACT

**APPARATUS AND RELATED METHOD FOR DATA
TRANSMISSION ACROSS A WIRELESS NETWORK**

5

The present invention provides for a transmitting means for transmitting data packets in a wireless network, wherein at least some of the data packets are arranged to include clock data for use at a receiving means in the network for clock reconstruction at the receiving means, the transmitting means including processing means and operating system means connected to a network controller for delivering the data packets to the network, wherein the transmitting means is arranged to identify packets arriving at the network controller and which require clock data, and wherein the network controller is arranged to insert the clock data within the said identified packet prior to transmission of the packet. Also provided is a system and method of synchronising the clock of a receiving means to a clock signal from a transmitting means in a wireless network, wherein the clock at the receiving means is reconstructed from a data packet delivered from the transmitting means and including the step of monitoring acknowledgement of receipt of the packet at the receiving means, and resending the said packet if receipt is not acknowledged, and including the step of inserting updated clock reference data in the packet prior to resending the packet.

[figure 2]

25

FIG. 1


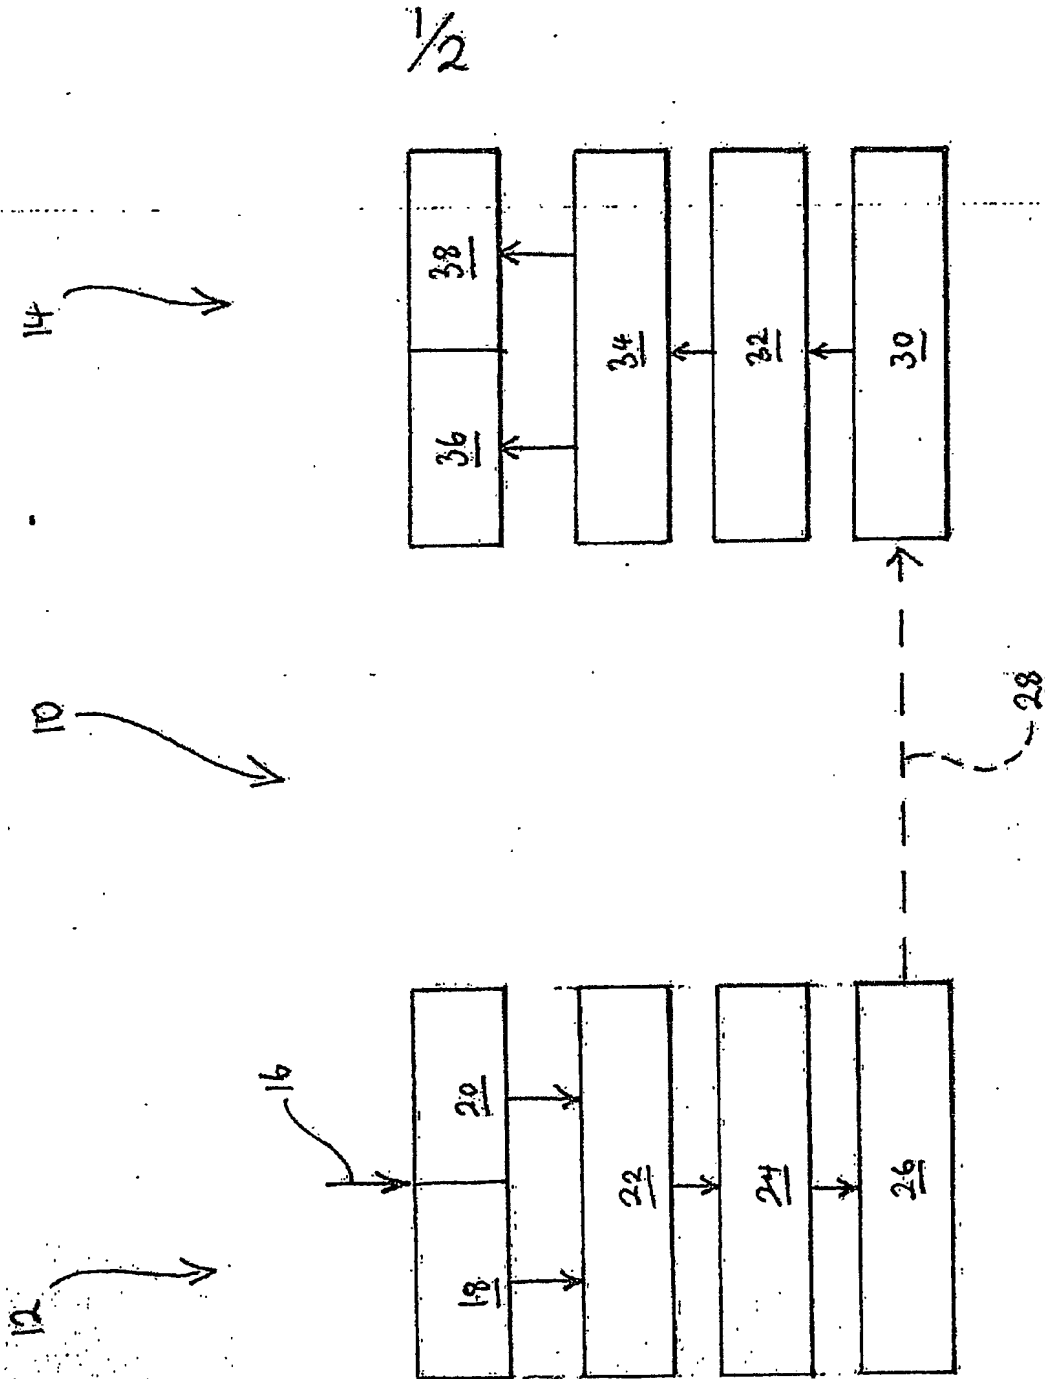


FIG. 2

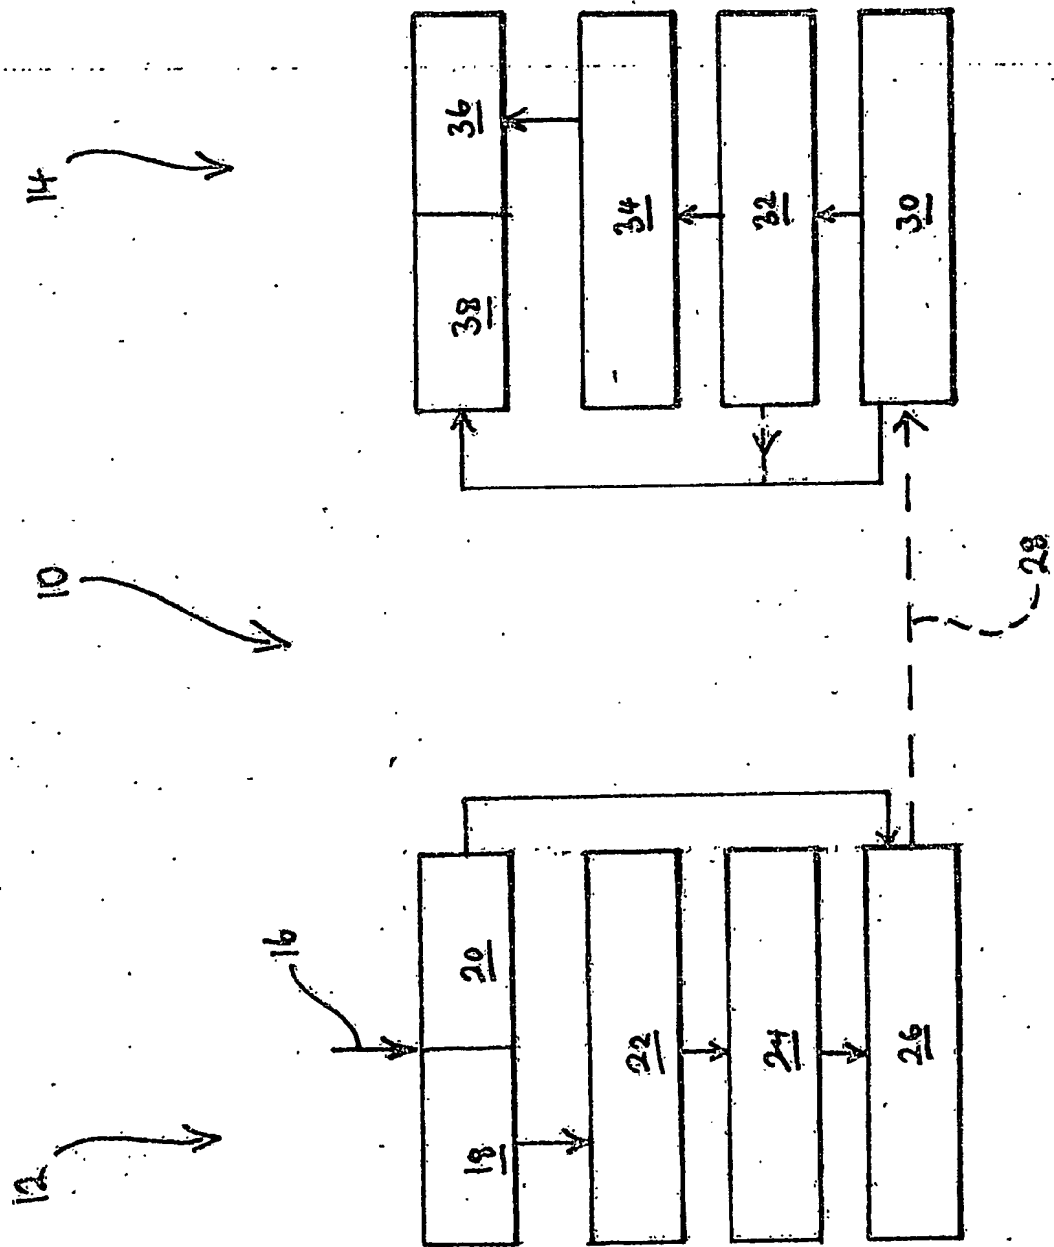

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.